

Winches

Manual winches with a maximum load of 300 kg and electric rope winches with maximum load of 4,000 kg

All our models have a sturdy, high-performance construction and are tried and tested in many tough everyday applications. All manual winches have a safety load brake and load-carrying capacity of up to 300 kg.


Our electrical winches are capable of extremely high performance and have load-carrying capacity of between 220 kg and 4,000 kg depending on the individual model. A powerful three-phase motor, up to 3 pulleys, adjustable lifting lim-



itation, including inductive slack rope switch and emergency manual operation, make these winches into easy-to-operate components for mounting alongside the upper unit of the loading system, or on a wall, ceiling or floor. All electric winches are also available as **explosion-proof** models.


WH1 Manual rope winch

Maximum load of 125 kg with safety load brake

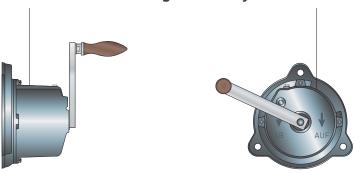

WH3L Manual rope winch

Maximum load of 300 kg with safety load brake

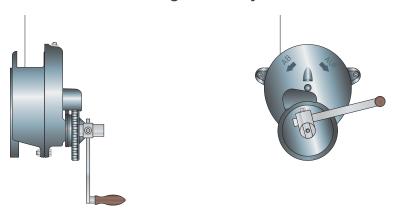

Manual winch characteristics:

With load pressure brake: The load is securely held in all positions

Rope fastening with a bore and grub screw

All bearing positions are maintenance free

Removable handle with foursided insert and ball-locking mechanism

Location of rope output can be adjusted in any direction by simply turning the housing as required

Wall-mounted winches are designed in accordance with drive mechanism group 1B and certified in accordance with accident preventions regulations (under AZH II 27 and 27/80)

Available with fold-up crank handle on request


Can also be treated to withstand extreme environmental conditions


LISTENOW WIN 07/2015 EN • We are committed to the constant development of our products, texts, diagrams and technical data and reserver the right to make changes to this information at any time.



L51 Electric rope winch

Maximum load of 125 kg with one pulley





Electric rope winch characteristics:

Attached three-phase motor

Built-in, adjustable hoist limitation system to limit up or down travel


Included inductive slack rope switch


Emergency manual use

Painted housing

L53 Electric rope winch

Maximum load of 200 kg to 600 kg with three pulleys





Electric rope winch characteristics:

Attached three-phase motor

Built-in, adjustable hoist limitation system to limit up or down travel


Included inductive slack rope switch


Emergency manual use

Painted housing

Electric rope winch

Maximum load of 500 kg to 4,000 kg





Electric rope winch characteristics:

Attached three-phase motor

Built-in, adjustable hoist limitation system to limit up or down travel

Oversized cable drum

Externally fitted slack rope switch

Painted housing

LISTENOW WIN 07/2015 EN • We are committed to the constant development of our products, texts, diagrams and technical data and reserver the right to make changes to this information at any time.